

# 高速頂針(螺帽型) HIGH-SPEED LIVE CENTER (WITH NUT)


RPM: 1500 - 5000 MT/MK. 3, 4, 5, 6

## NCH 型 LIVE CENTER





A-TYPE



迷宮式迴轉頂針無油封防水結構  
專利號碼 M553237  
MAZE TYPE, WATERPROOF DESIGNED  
WITHOUT SEAL, PAT. NO. M553237

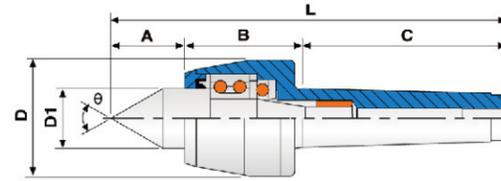

B-TYPE

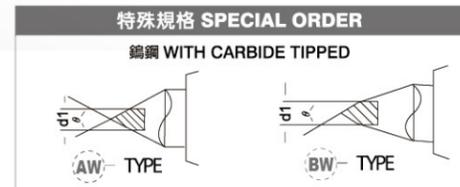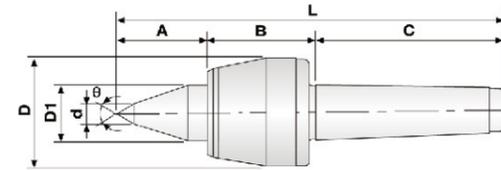

## NCH-T 型 LIVE CENTER

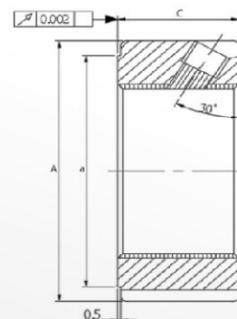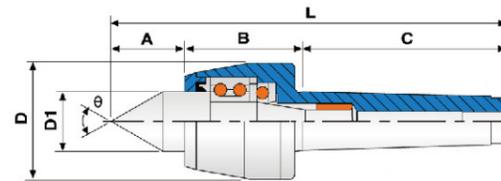


MORES TAPER MT/MK	DIMENSIONS(mm)			
	A	a	B	C
NCH-MT.4AT NCH-MT.4BT	70	64	M48x1.5	20
NCH-MT.5AT NCH-MT.5BT	70	64	M50x1.5	20

## NCH 型 LIVE CENTER

1. 前端使用雙列滾珠軸承及止推軸承，滾針軸承之組合。
  2. 適用於CNC車床，具中負荷使用與防水性。
  3. 車床尾座調整壓力建議5~8公斤。
- ※ NCH-B(T)型；適合小工作物之加工切削。

1. Center shaft is made of alloy steel and hardened through vacuum heat treatment to provide higher rigidity HRC60 $\pm$ 1 $^{\circ}$
  2. Center is fitted with dual ball bearing, thrust bearing and needle roller bearing assembly, the waterproof is maze type.
  3. The tailstock pressure of lathe adjusts to five to eight kilograms. (for reference)
- ※ Applicable to high speed lathes and CNC lathes with heavy loads.

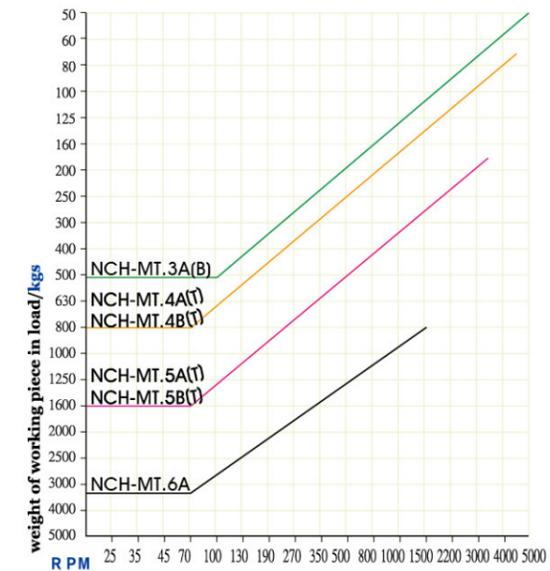

單位/Unit:mm

ORDER NO.	MORES TAPER MT/MK	A	B	C	D	D1	d	L	d1	Co精度 Accuracy	Max R.P.M	$\theta$	G.W. WEIGHT kgs	包裝尺寸 L x W x H
08030002	NCH-MT.2A	20	43	69	35.7	13	-	132	-	0.003	6000R.P.M	60 $^{\circ}$	0.38 kgs	70 x 50 x 50
08030003	NCH-MT.3A	39	55	86	53	30	-	180	12	0.003	5000R.P.M	60 $^{\circ}$	1.30 kgs	240 x 80 x 65
08030004	NCH-MT.4A	43	60	108	63	32	-	211	12	0.003	4500R.P.M	60 $^{\circ}$	2.08 kgs	263 x 100 x 90
08030005	NCH-MT.5A	45	71	136	83	40	-	252	18	0.003	3500R.P.M	60 $^{\circ}$	4.40 kgs	320 x 118 x 110
08030006	NCH-MT.6A	80	110	190	128	70	-	380	-	0.008	1500R.P.M	60 $^{\circ}$	16.5 kgs	425 x 185 x 180
08030013	NCH-MT.3B	45	55	86	53	30	10	186	12	0.003	5000R.P.M	60 $^{\circ}$	1.34 kgs	240 x 80 x 65
08030014	NCH-MT.4B	53	60	108	63	32	12	221	12	0.003	4500R.P.M	60 $^{\circ}$	2.12 kgs	263 x 100 x 90
08030015	NCH-MT.5B	65	73	136	83	40	14	274	18	0.003	3500R.P.M	60 $^{\circ}$	4.42 kgs	320 x 118 x 110
08020044	NCH-MT.4AT	42	76	108	60	32	-	226	12	0.003	4500R.P.M	60 $^{\circ}$	2.42 kgs	263 x 100 x 90
08020045	NCH-MT.5AT	45	84	136	83	40	-	265	18	0.003	3500R.P.M	60 $^{\circ}$	5.02 kgs	320 x 118 x 110
08030046	NCH-MT.6AT	80	130	190	128	70	-	400	-	0.008	1500R.P.M	60 $^{\circ}$	16.5 kgs	425 x 185 x 180
08020054	NCH-MT.4BT	52	76	108	60	32	12	256	12	0.003	4500R.P.M	60 $^{\circ}$	2.46 kgs	263 x 100 x 90
08020055	NCH-MT.5BT	65	84	136	83	40	14	285	18	0.003	3500R.P.M	60 $^{\circ}$	5.04 kgs	320 x 118 x 110